

DL9 TWO POST LIFT

9,000 LBS. CAPACITY

VERSATILE AND PRODUCTIVE

ASYMMETRIC ARM DESIGN WITH SYMMETRIC COLUMNS FOR EASE OF VEHICLE ENTRY AND EXIT

FEATURES:

- Clear floor model
- Single point lock release
- Self-setting locking system
- Padded shut-off bar
- Adapters extensions included
- Anchor bolts included
- Powder coat finish
- Available in blue only



COMMERCIAL GRADE LIFT!


2-STAGE ARM DESIGN ACCOMODATES VEHICLE SPOTTING BOTH SYMMETRICALLY AND ASYMMETRICALLY

POSITION DOORS IN FRONT OR BEHIND COLUMNS FOR EASY TECHNICIAN ACCESS

DL9 LIFTS INCLUDE

PADDED THREAD-UP ADAPTERS WITH FOUR (4) EACH 2 1/2" ADAPTER EXTENSIONS

Asymmetric Vehicle Placement

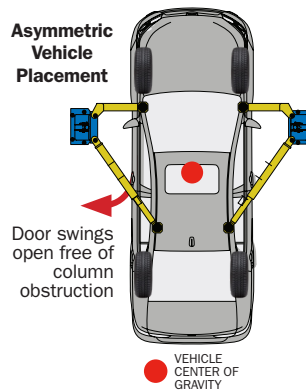

DL9 SPECIFICATIONS

| | |
|-------------------------------|-------------------------------|
| Capacity | 9,000 lbs. |
| Maximum Rise with Extensions* | 75 1/2" |
| Overall Height | 11' 9" |
| Ceiling Height Required | 12' |
| Overhead Switch Height | 137 5/8" |
| Width Inside Columns | 109" |
| Overall Floor Width | 10' 9" |
| Drive Thru Width | 90 1/4" |
| Front Arm Reach (Min/Max) | 28" / 41 1/2" |
| Rear Arm Reach (Min/Max) | 30 1/2" / 44 3/4" |
| Column Size | 6 13/16" x 10 1/2" |
| Column Base | 15" x 18" |
| Time to Full Rise | 45 Seconds |
| Motor | 220 Volt, 2HP Single Phase |

* Rise measures from floor to highest adapter position with use of available adapter extension.
Specifications subject to change without notice or liability



CONTACT THE FACTORY DIRECT WAREHOUSE IN YOUR AREA
866-347-5438 • WWW.DIRECTLIFT.COM