

# Bench Lathes

## BL Series Brake Lathes

### SPECIFICATIONS





BL73 shown w/ optional bench, Hood, and Tablet

\*with 1-7/8" Arbor. \*\*19.5" with Hood

Power Requirements		
Location	BL1x	BL7x (W/ ACT / Digi-Cal)
<b>Domestic</b>	115 V, 15 A, 50-60 Hz 1ph	115 V, 15 A, 50-60 Hz 1ph
<b>Optional</b>	220 V, 7.5 A, 50-60 Hz 1ph	220 V, 7.5 A, 50-60 Hz 1ph
<b>International</b>	220 V, 7.5 A, 50-60 Hz 1ph	220 V, 7.5 A, 50-60 Hz 1ph
<b>Optional</b>	115 V, 15 A, 50-60 Hz 1ph	NA
Base Model		W/Anti-Chatter Technology
<b>Rotor Diameter**</b>	6-22 in. (152.4-584.2 mm)	6-22 in. (152.4-584.2 mm)
<b>Rotor Max Width</b>	5 3/8 in. (136.5 mm)	5 3/8 in. (136.5 mm)
<b>Rotor Max Thickness</b>	2 in (50.8 mm)	2 in. (50.8 mm)
<b>Drum Diameter**</b>	6-24 in. (152.4-609.6 mm)	6-24 in. (152.4-609.6 mm)
<b>Drum Max Width</b>	8 in. (203.2 mm)	8 in. (203.2 mm)
<b>Max Arbor Weight*</b>	200 lbs (90.7 kg)*	200 lbs (90.7 kg)*
<b>Motor</b>	1.5 hp (1.12 kw)	1.5 hp (1.12 kw)
<b>Spindle Speeds</b>	85,110,175 rpm	85,110,175 rpm
<b>Feed Rate</b>	002-.014 in./rev(.05 -.36 mm/rev.) Infinitely Variable	002-.014 in./rev(.05 -.36 mm/rev) Infinitely Variable

	BL10	BL11	BL13	BL70	BL71	BL73
<b>Tablet</b>				✓	✓	✓
<b>Rotor Capability</b>	✓	✓	✓	✓	✓	✓
<b>ACT / DigiCal 2.0</b>				✓	✓	✓
<b>Bench</b>		✓	✓		✓	✓
<b>Dust Collection Hood</b>			✓			✓
<b>Width (W)</b>	48" 1219 mm	43.5" 1105 mm	45" 1143 mm	43.5" 1105mm	45" 1143mm	48" 1219mm
<b>Height (H)</b>	13" 330mm	75.5" 1918mm	75.5" 1918mm	13" 330mm	75.5" 1918mm	75.5" 1918mm
<b>Depth (D)</b>	36.5" 927mm	41" 1041mm	53.5" 1359mm	36.5" 927mm	41" 1041mm	53.5" 1359mm

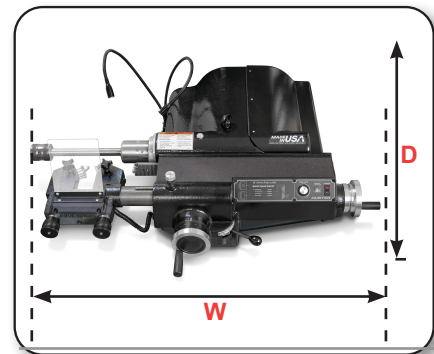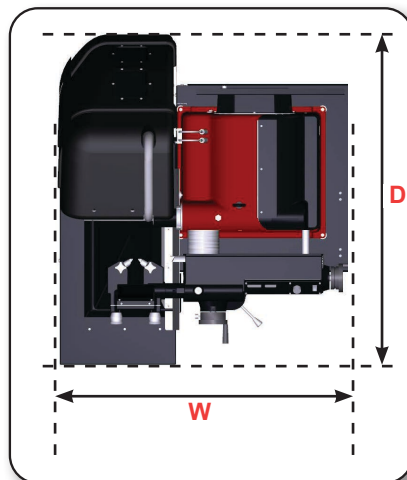

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)  
or call  
800-731-0000

Because of continuing technological advancements, specifications, models and options are subject to change without notice.