

# RX14KL, RX14KLPS & RX14KLIS

## Surface Mount Lift Rack

**HUNTER**  
Engineering Company

### SPECIFICATIONS



RX14KLIS Shown

#### Site Specifications


Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	130-150 PSI (9-10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700 kPa) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)

#### Product Specifications

Max. Vehicle Weight	14,000 lbs. (6300 kg)
Max. Wheelbase	
General Service	201 in. (5105 mm)
Two-Wheel Alignment	195 in. (4953 mm)
Four-Wheel Alignment	168 in. (4267 mm)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed, 60 seconds
Lowering Speed	2 speed, 25 seconds

### MODEL FEATURES / DIMENSIONS / OPTIONS

Features	KL	KLPS	KLIS	Dimensions		Options	Add Length	Kit #
9000-lb Swing Air Jacks (2)	✓	✓	✓	Width (W1)	92.5 in. 2350 mm	Approach Ramp Extensions (Back)	5 in. 127 mm	20-3113-1
Two-Speed Lowering	✓	✓	✓	Inside Width (W2)	40 in. 1016 mm	Approach Ramp Extensions (Back)	37 in. 940 mm	20-2189-1
<b>FIA</b> Fully Integrated Alignment		✓	✓	Length (L)	280 in. 7112 mm	Drive-Thru Kit (Front)	53 in. 1346 mm	20-2498-1
<b>POWER SLIDE</b>		✓	✓	Elevated Length (L2)	255 in. 6464 mm			
<b>INFLATION STATION</b>			✓	Runway Width (R)	26 in. 660 mm			
				Raised Height (H1)	72 in. 1829 mm			
				Stack Height (H2)	10.75 in. 273 mm			

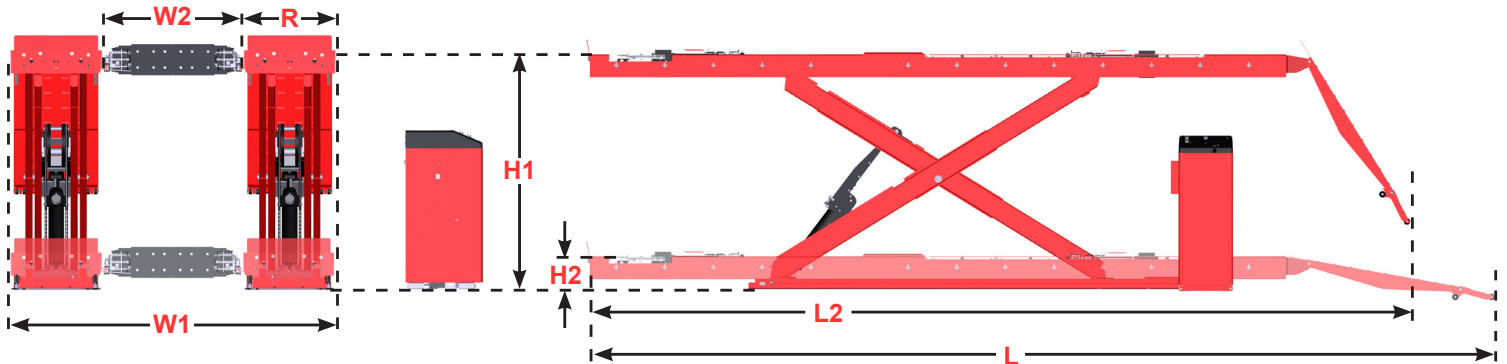

Continued on Page 2

For lift rack information visit:  
[www.hunter.com/alignment-racks](http://www.hunter.com/alignment-racks)


For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)  
or call  
314-731-0000

For local contact visit:  
[www.hunter.com/contact](http://www.hunter.com/contact)

# RX14KL, RX14KLPS & RX14KLIS

## Surface Mount Lift Rack

### SPECIFICATIONS

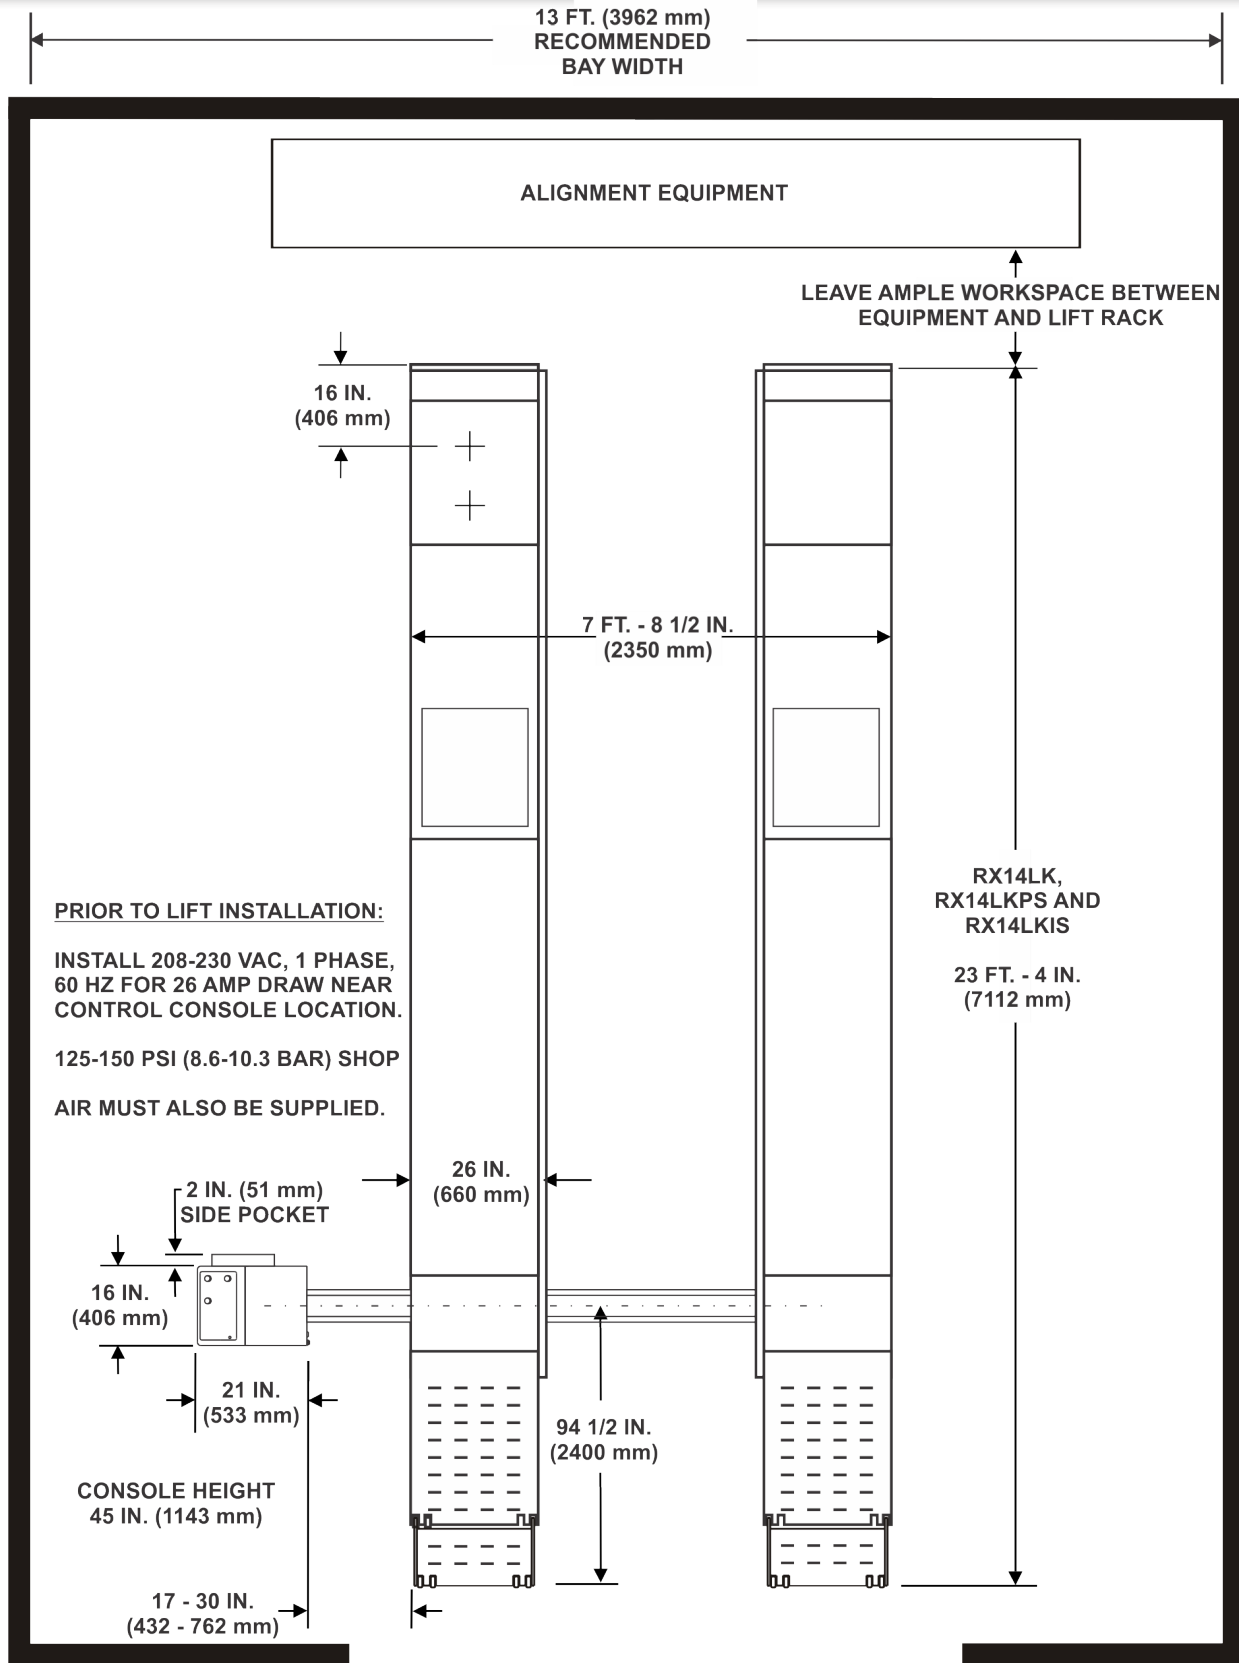

\*Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 16.5 feet (5029 mm) at the turnplate end. Additional threshold and perhaps hydraulic hoses will be required (refer to Installation Instruction for details).