


RX16KLF & RX16KLFPS

Flush Mount Lift Rack

HUNTER
Engineering Company

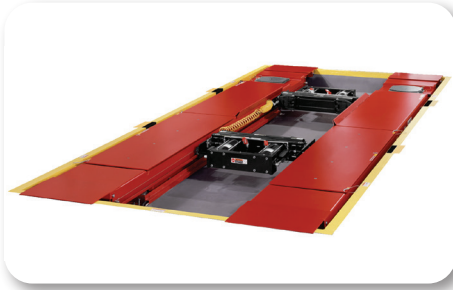


SPECIFICATIONS




RX16KLFPS Shown

Site Specifications	
Floor Pocket Requirements	Refer to RF08114-00 for full details
Power Requirements	208-230 VAC, single phase power, 26 AMP
Air Supply Requirements	130-150 PSI (9-10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700kPA) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)
Product Specifications	
Max. Vehicle Weight	16,000 lbs. (7200 kg)
Max. Wheelbase	
General Service	201 in. (5105 mm)
Two-Wheel Alignment	195 in. (49531 mm)
Four-Wheel Alignment	168 in. (4267 mm)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1-speed 60 seconds
Lowering Speed	2-speed, 25 seconds

MODEL FEATURES / DIMENSIONS

Features	KLF	KLFPS
9000-lb Swing Air Jacks (2)	✓	✓
Two-Speed Lowering	✓	✓
		✓
		✓
		

Dimension	
Outside Width (W1)	96.5 in. 2451 mm
Inside Width (W2)	40 in. 1016 mm
Length (L)	237 in. 6020 mm
Runway Width (R)	26 in. 660 mm
Raised Height (H1)	70 in. 1778 mm
Depth (H2)	12.5 to 13 in. 318 to 330 mm

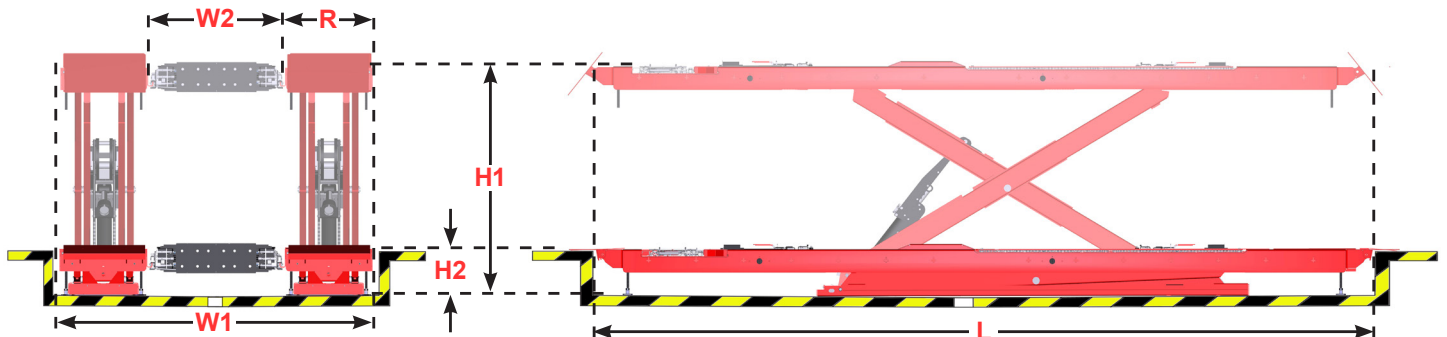

For lift rack information visit:
www.hunter.com/alignment-racks

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call **800-448-6848**

Because of continuing technological advancements, specifications, models and options are subject to change without notice.


Form RS08132-00, 06-23a
Supersedes Form RS08132-00, 06-23
Copyright © 2023-2024, Hunter Engineering Company

RX16KLF & RX16KLFPS

Flush Mount Lift Rack



SPECIFICATIONS (Refer to RF08114-00 for construction drawing)

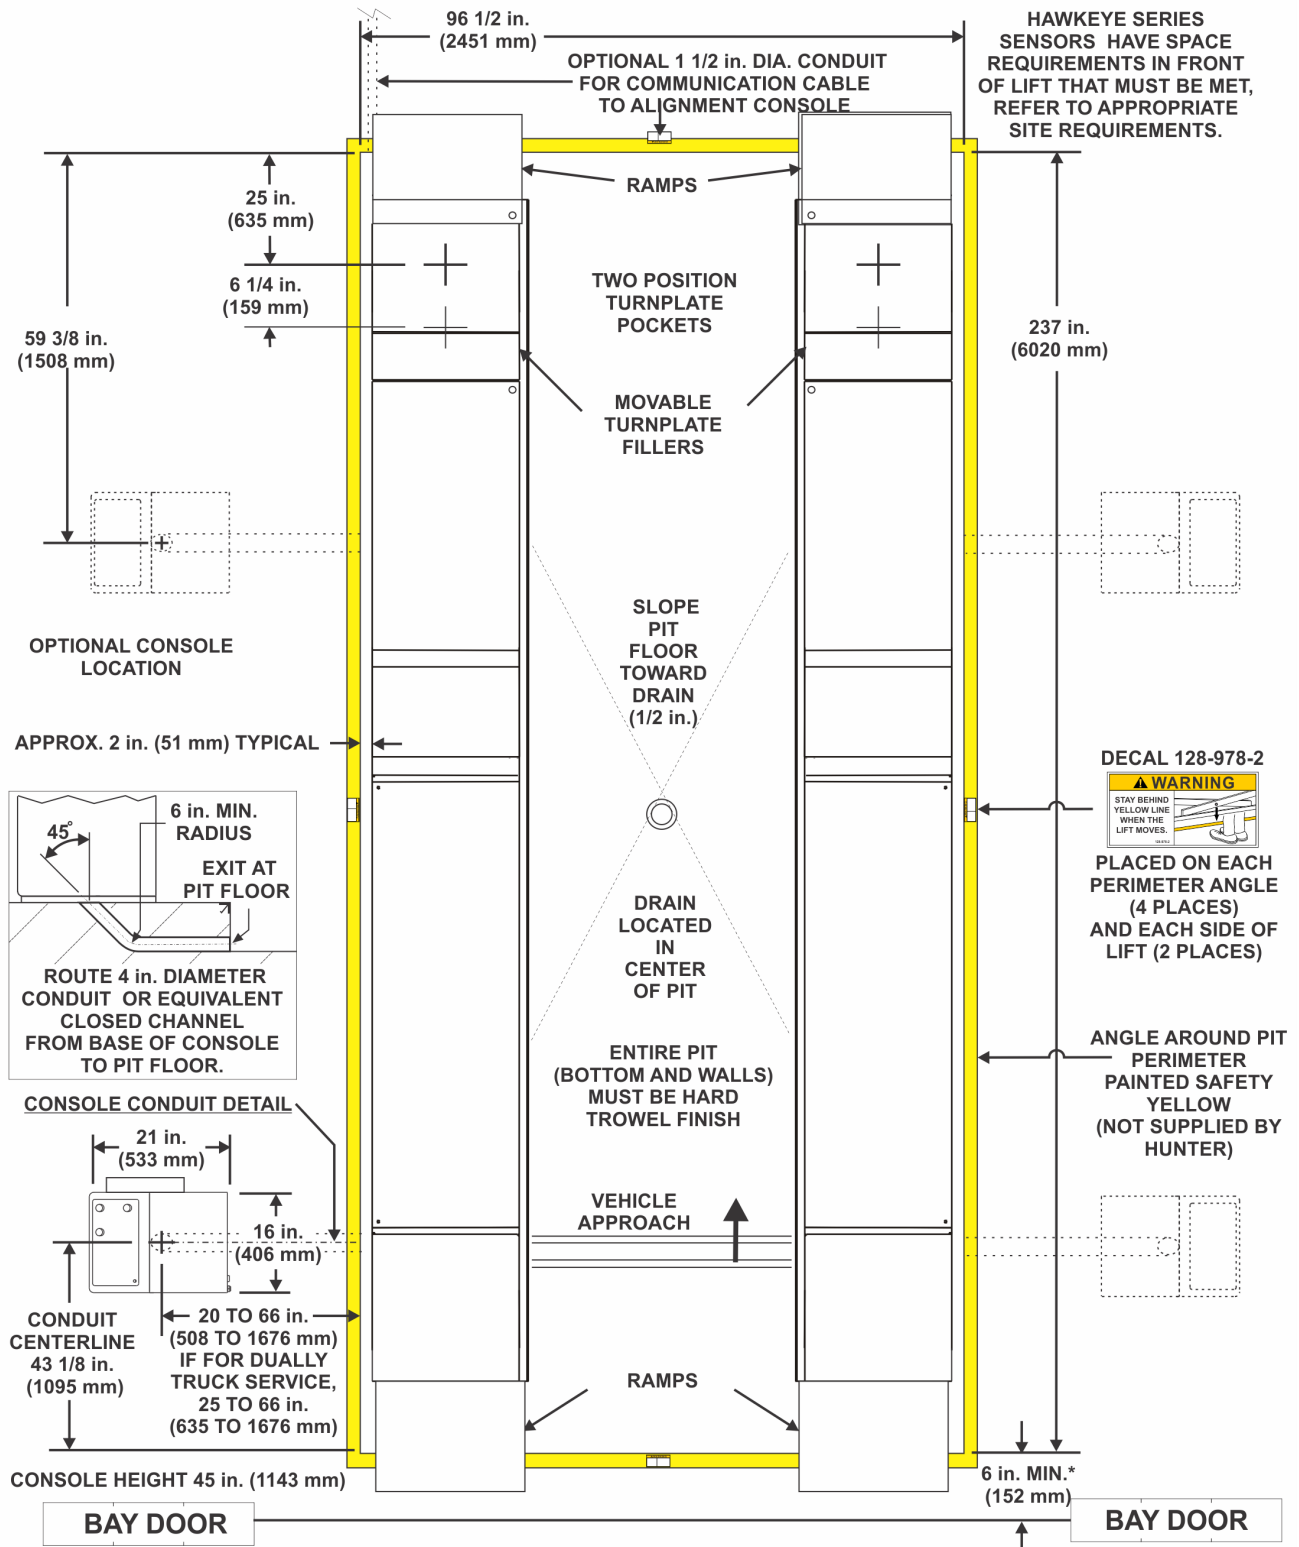

* LONGER VEHICLES WILL NEED TO BE SERVICED WITH THE BAY DOOR OPEN. TO ACCOMMODATE MOST VEHICLES, INCREASE THE SPACE BEHIND THE PIT TO 39 in. (991 mm) OR GREATER.

Dimensions shown are for end result. Tile thickness (if applicable) must be considered before pouring concrete. Positioning of control console is limited to a maximum space between console and rack of 5 1/2 feet (1676 mm) at the approach ramp end and 16 feet (4877 mm) at the turnplate end.