

Site Requirements




| Site Specifications | |
|-------------------------|---------------------------|
| Electrical Circuit Req. | 208-230V / 50/60Hz / 1 ph |
| Air Supply Req. | 115-145 PSI (8-10 bar) |
| Base Machine Weight | 925 lbs / 420 kg |
| Width | 77 in / 1956 mm |
| Height | 80 in / 2032 mm |
| Depth | 55 in / 1397 mm |

| Key Specifications | |
|---|--|
| Mount / Demount Tool | Polymer Standard Head |
| Clamping Type | Center |
| Bead Loosening Type | Side Shovel |
| Rim Diameter Range | 10 in / 254 mm - 30 in / 762 mm |
| Maximum Tire Diameter | 44 in / 1130 mm |
| Maximum Wheel Width | 14 in / 356 mm |
| Drive Speed | 7 and 17 rpm CW, 7 rpm CCW |
| Bead Press Features | Upper Press Foot, FastBlast Inflation, Lower Locking Disc. |
| Wheel Lift Capacity (if equipped) | 175 lbs / 79 kg |
| H1 *Height between Center Clamp and Standard Mount / Demount Head | 11 in / 279 mm |

*Maximum reverse-type wheel width may depend on offset

Overall Footprint

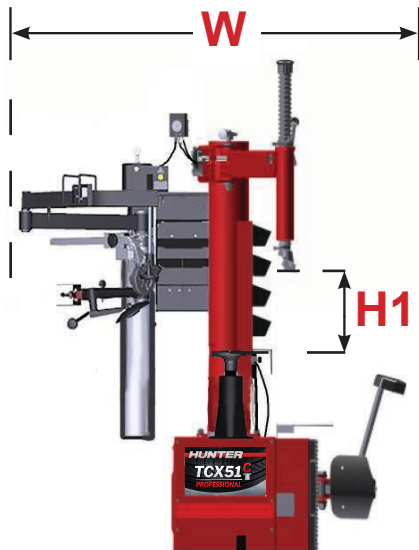

For tire changer information visit:
www.hunter.com/tire-changers/

For general inquiries visit:
www.hunter.com
or call
800 448-6848

For local contact visit:
www.hunter.com/contact-hunter

Form CF07962-00, 01-23 Supersedes 09-22
Copyright © 2022-2023, Hunter Engineering Company