

# TCX635 HD & PHD

Heavy Duty Tire Changer

**HUNTER**  
Engineering Company

## SPECIFICATIONS [ ]




TCX635PHD



TCX635HD

Power Requirements	208-240V, 1 ph, 60Hz, 20A NEMA L6-20P
Maximum Tire Diameter	58 in (1,473 mm)
Maximum Wheel Width	27 in (686 mm)
Maximum Wheel Weight	1,545 lbs (700 kg)
Minimum Rim-Center Hole Diameter	3.94 in (100 mm)
Rim Diameter Range	14.5 - 24.5 in (368 - 622 mm)
Match Mounting Capable	Yes
Torque	1,625 ft-lbs. (2,203 N-m)
Rotation Speed	9 rpm CW & CCW
Shipping Weight	1,168 lbs (530 kg)
Width (W)	86 in. (2,184 mm)
Height (H)	40 - 52 in (1,016 - 1,321 mm)
Depth (D)	28 - 65 in (711 - 1,651 mm)

TCX635 - ACCESSORIES	HD	PHD
Aluminum Wheel Clamp	✓	✓
Steel Wheel Clamp	✓	✓
Tire Paste & Brush	✓	✓
Hook & Hook Pin	✓	✓
Roller	✓	✓
Lever	✓	✓
Pocket V Cover	✓	✓
Two Ramps		✓
Mounting Lever		✓
Aluminum Jaw Covers		✓

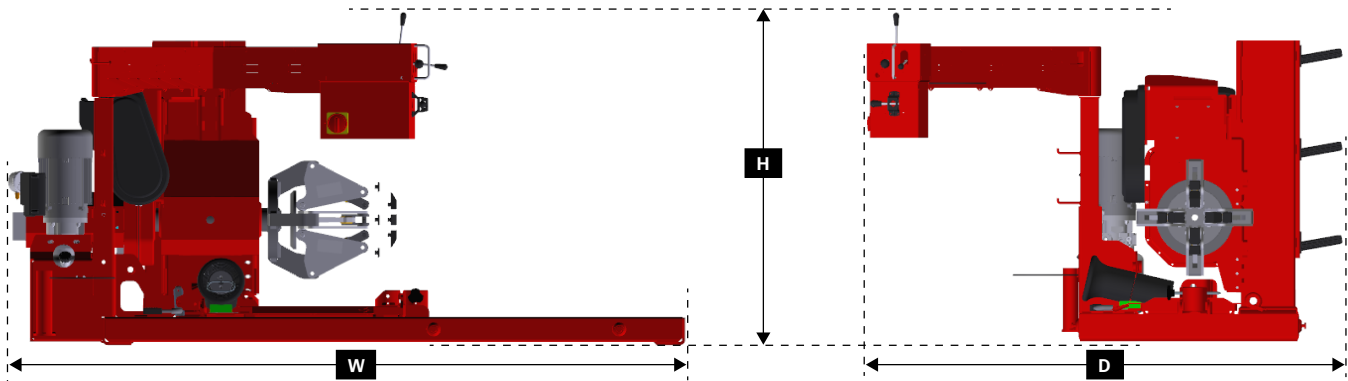

For tire changer information visit:  
[hunter.com/tire-changers](http://hunter.com/tire-changers)

For local contact visit:  
[hunter.com/contact](http://hunter.com/contact)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form CS07823-00, 05-24  
Supersedes Form CS07823-00, 09-20  
Copyright ©2024, Hunter Engineering Company