

R573

EXTREME HD

HEAVY DUTY TIRE CHANGER FOR EXTRA-LARGE WHEEL DIMENSIONS

**SERVICE TRUCKS, AGRICULTURAL,
AND EARTHMOVING VEHICLES WITH
TIRE DIAMETERS UP TO 106"**

FEATURES:

- Console cable control unit with metal sheath
- Double speed table rotation
- Quick locking manual rotation tool
- Tire paste lubricant and brush



UNIVERSAL TIRE CHANGER FOR EXTREME WHEEL SIZES

SPECIAL ORDER

ELECTRO HYDRAULIC CHANGER

HIGH BEAD BREAKING FORCE


The considerable bead breaking force makes mounting and demounting tires effortless.

MULTIPLE ADJUSTMENT GUIDES


The electro-brake allows immediate stopping of the rotation to avoid any damage to tires.

STAND-BY FUNCTION

After 5 sec. the machine has not been used, the motor will turn off.

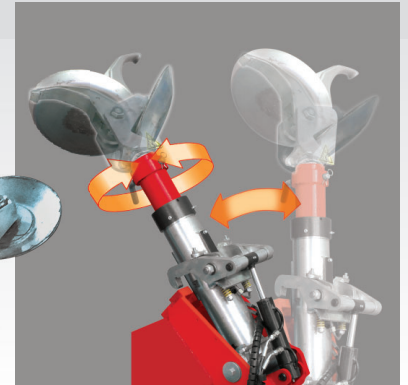

**AUTOMATIC LIFTING
and ROTATION**

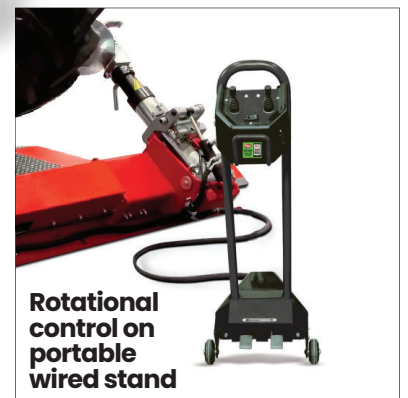

**Rotational
control on
portable
wired stand**



OVERSIZED CHUCKING DIMENSION

Allows work on larger tires without interference.
Reach 50" wheels without extensions or wheels from
51" to 60" with optional VSG108A39 adapter set.


HYDRAULIC CLAMPING

Ideal for 19" and 22.5" truck wheels

- 4" min. clamping
- 13" min. height



TIRE DIMENSIONS



ADDITIONAL MODEL

R573BT Cordless

Communicates via
Bluetooth® transmission

SPECIAL ORDER ONLY / Contact factory for details

ROTARY

BY ROTARY SOLUTIONS

R573 COMMERCIAL TIRE CHANGER

FEATURES

- Console cable control unit with metal sheath
- Double speed table rotation
- Quick locking manual rotation tool
- Tire paste lubricant and brush

R573 services:



Optional equipment may be required



SPECIFICATIONS:

Chucking unit rotation motor	2.95 Hp / 2.2 kW
Hydraulic drive unit motor	3.35 Hp / 2.5 kW
Rim diameter	11" - 50"
With VSGA108A39 adapters	51" - 60"
Maximum tire diameter	106" (2700mm)
Maximum tire width	69" (1750mm)
Chuck rotation speed (rev/min)	1 - 5 - 10
Power supply	220v / 3Ø / 60 Hz

Site Requirements: 220V / 3Ø / 60 Hz power supply

ROTARY WHEEL SERVICE EQUIPMENT carries a 3 year parts and 1 year labor warranty. See website for details.

STANDARD EQUIPMENT



VSG108A2
Standard clamp protections for alloy rims / 4 x kit



VSG108A25
Steel rim clamp for earth-moving wheels



VSG90A6
Aluminum rim clamp



B5308000
Long bead lifting lever

OPTIONAL ACCESSORIES


VSG108A39

Set of extensions to increase clamping capacity (4 x kit)



VSG108A34
Pneumatic bead pushing device

VSG108A3 Tire Lever



VSG108A13 Rings Lever



To learn more about all of our automotive service and repair solutions or to contact your local distributor, visit us at www.RotarySolutions.com today.

Need assistance or have questions? We're here to help:
800.445.5438 / Sales: insidesales@rotarysolutions.com
Technical Support: WS-techsupport@rotarysolutions.com

ROTARY SOLUTIONS™
2700 Lanier Drive | Madison, IN 47250, U.S.A.

Lit# [Rotary.R573.Cutsheet.12.01.2025](#)

©2025 VEHICLE SERVICE GROUP™
All Rights Reserved. Unless otherwise indicated, ROTARY SOLUTIONS™, VEHICLE SERVICE GROUP™, DOVER® and all other trademarks are property of Dover Corporation and its affiliates.

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.