
TCX51C Professional Tire Changer

Center clamp tire changer with FastBlast™ inflation system







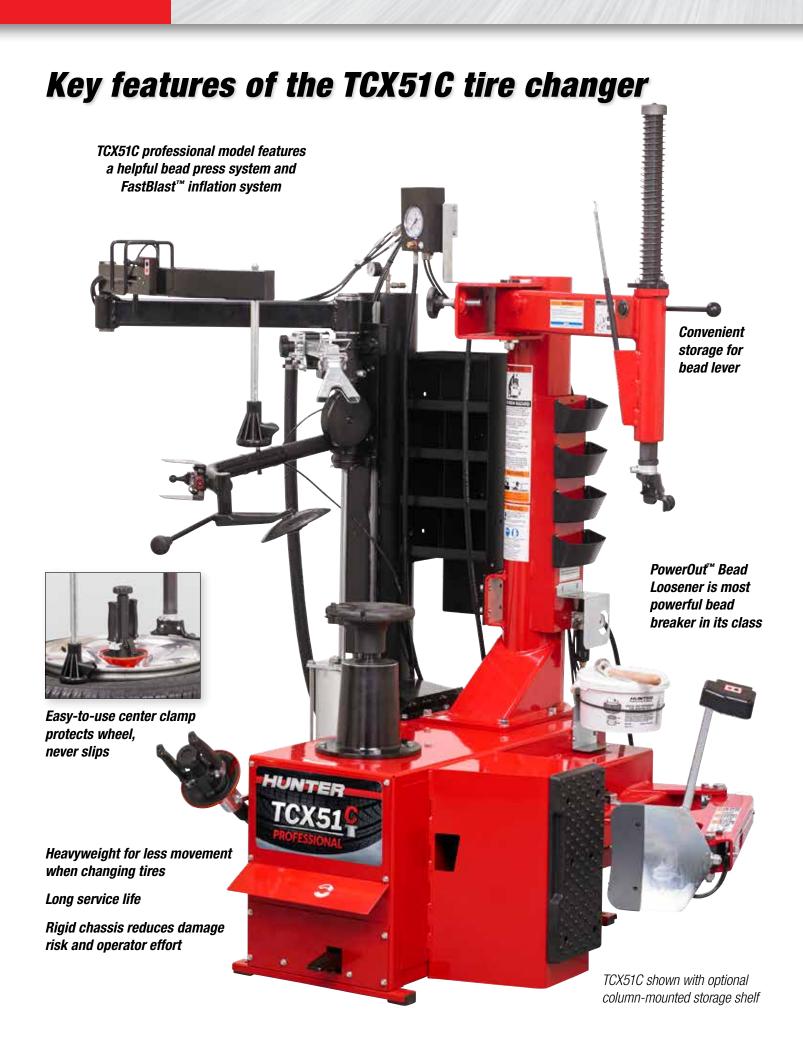



FastBlast™ Inflation System

✓ Large 6.5 gallon air tank features a higher capacity than most portable inflation devices



Nozzle is securely mounted to Bead Press carriage, allowing safe, completely hands-free operation.

Bead Press System

- Helps with demounting and mounting difficult combinations
- ✓ Large diameter cylinder is most powerful in its class

 Lower locking disc is great for re-breaking, demounting bottom beads, and lifting heavy tires into the drop center



Press arm pushes tire into drop center for mounting and demounting operations



Lower locking disc can demount bottom beads



Lifting hook aids the demounting of heavy tires.

TCX51C Specifications

Key Specifications

Mount / Demount Tool	Polymer Standard Head
Clamping Type	Center
Bead Loosening Type	Side Shovel
Rim Diameter Range	10 in to 30 in (254 mm to 762 mm)
Maximum Tire Diameter	44 in (1130 mm)
Maximum Wheel Width	14 in (356 mm)
Drive Speed	7 and 17 rpm CW, 7 rpm CCW
Wheel Lift Capacity (if equipped)	175 lbs (79 kg)

Site Specifications

Electrical Circuit Req.	208-240V / 50/60Hz / 1 ph
Air Supply Req.	115-145 PSI (8-10 bar)
Base Machine Weight	925 lbs (420 kg)
Width	77 in (1956 mm)
Height	80 in (2032 mm)
Depth	55 in (1397 mm)

Popular Optional Accessories



Wheel lift - 20-3863-1

Eases servicing of large assemblies. Allows for more careful handling of expensive wheels



Clamp adaptor – RP11-8-11100417

Adds clamping capability for truck wheels with large center holes. Adds clamping height for high offset wide wheels.



Heavy-duty flange plate kit — 20-3158-1

Required for plastic clad wheels or reverse wheels



Model #: TCX51CEN

220V electric 2-speed wide-chassis tire changer with bead press arm

Standard equipment

- Bead press arm
- Polymer mount head
- Standard bead lever
- Polymer protectors for bead lever, shovel, and clamping cones
- ✓ FastBlast[™] inflation system
- ✓ Four storage pockets



See form **CB04042-00** for more tire changer accessories.

Because of continuing technological advancements, specifications, models and options are subject to change without notice.



www.hunter.com